



Velocity Transducer TM0793V

Piezoelectric Velocity Transducer

The TM0793V-K velocity transducer kit consists of one velocity transducer and one 5 meter cable. This velocity transducer kit directly interfaces with ProvibTech's signal conditioners: DTM, TR transmitters, DM dual monitors and PT580 vibration switches to measure case vibration in velocity or displacement.

Specifications

Electrical

Sensitivity: 4.0mV/mm/sec (100mV/in/sec),
@ 25°C, ±10%

Velocity Range: 5.0V pk

Amplitude Nonlinearity: 1%

Frequency Response: 2 - 7,000Hz (±3dB)

Isolation: Fully isolated

Transverse Sensitivity: < 5% or axial



Power Requirement:


3 - 10mA constant current
18 - 30VDC

Resonance Frequency: 15 kHz

Bias Voltage: 10 - 14VDC

Maximum Transmission Distance:

300 meters (1,000 feet)

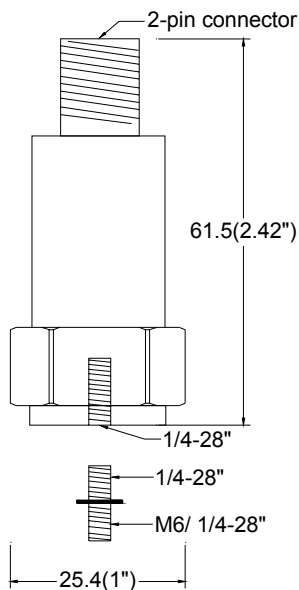

Environmental and Physical

Temperature Range: -50°C to +120°C

Environmental Protection: IP67

Weight: 250 grams

Case Material: Stainless steel

Mounting: 1/4-28UNF tapped hole

Hazardous Area Approvals:

ATEX: II 1 G Ex ia IIC T4;

CSA: I.S. Class I, Div. 1, Groups A, B, C & D
Exia IIC T4

Class I, Div.2, Groups A, B, C, D
Non-Incendive

PCEC: Ex ia IIC T4X

TR CU: 0Ex ia IIC T4 X

№ TC RU C-US.ТБ05.В.00477
NANIO CCVE

Connection

A: Power (red)



B: COM (white)

Order Information

TM0793V-M

Velocity sensor with mounting screw 1/4-28" to M6x1

TM0793V-E

Velocity sensor with mounting screw 1/4-28" to 1/4-28"

TM0793V-K-M

Velocity sensor kit includes:

- ✓ TM0793V velocity sensor
- ✓ Mounting screw (1/4-28" to M6x1)
- ✓ TM0702-05

TM0793V-K-E

Velocity sensor kit includes:

- ✓ TM0793V velocity sensor
- ✓ Mounting screw (1/4-28" to 1/4-28")
- ✓ TM0702-05

Accessories:

(Standard cable length is 5 meters. XX = 05)



TM0702-XX: Aluminum MIL connector with XX meters cable, 6.35mm diameter. Operating temperature range goes up to 120°C (250°F)



TM0703-XX: Seal tight boot connector with XX meters cable, 6.35mm diameter. Operating temperature range goes up to 120°C (250°F)



TM0704-XX: Stainless steel MIL connector with armored XX meters cable, 4.83mm diameter. Operating temperature range goes up to 150°C (300°F), Maximum Length is 10 meters.

TM0704-XX-F: Stainless steel MIL connector with Armor with FEP jacket XX meters cable.



TM0705-XX: Cornered MIL connector with armored XX meters cable, 4.83mm diameter. Operating temperature range goes up to 120°C (250°F), Maximum Length is 10 meters.

TM0705-XX-F: Cornered MIL connector with Armor with FEP jacket XX meters cable.

TM0710: Mounting screw 1/4-28" - M6x1

TM0711: Mounting screw 1/4-28" - 1/4-28"

TM0712: Mounting screw 1/4-28" - M8

TM0793V-M-S

Velocity sensor with mounting screw 1/4-28" to M6x1
Hazardous area approval

TM0793V-E-S

Velocity sensor with mounting screw 1/4-28" to 1/4-28"
Hazardous area approval